


Reach Through Strips

Installation Instructions

Reach Through Strips are for use on vertical type open front Multi-Deck refrigerated display cases and freezers with in line fronts. The strips come fully assembled and are ready to install using a pressure sensitive “hook & loop” tape (Velcro). The loop tape is part of the assembly, and the hook tape must be installed on the case.

Note: Before installing Reach Through Strips, clean the area where you plan to install the hook tape to insure that the adhesive tape bonds to the case.

Tip: Warm the hook tape before installation for the best bond. Installing cold tape on a damp or oily surface will cause the bond to fail.

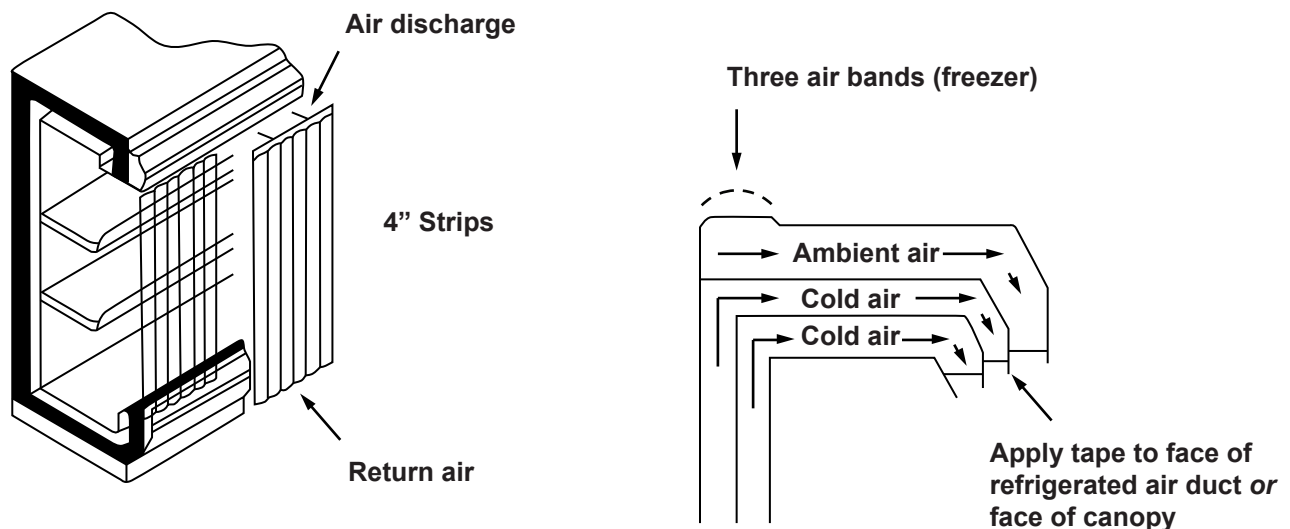

Installation:

Hang the Reach Through Strips so that they hang straight down on the front of the case. This will direct the refrigerated air from the discharge to the return.

Remove the paper backing from the hook tape and firmly press the tape to the case on a horizontal line, the full length of the case. Press the Reach Through Strip units to the hook tape. Continue hanging strips butting together. Strips can be trimmed in 4” increments.

Freezer cases with ambient air bands: Install tape between the refrigerated band and the warm air band (ambient).

Do NOT install hook tape on case light fixtures.

Reach Through Strips can be trimmed at the bottom if desired.

The strips can be cleaned with a mild soap and warm water.